

PRODUCT CHART

Effective: January 2022




MERCIER 2022 Product Chart

SB Select & Better
DS Distinction
AT Authentic
RQ Rift & Quarter Sawn
PRO PRO





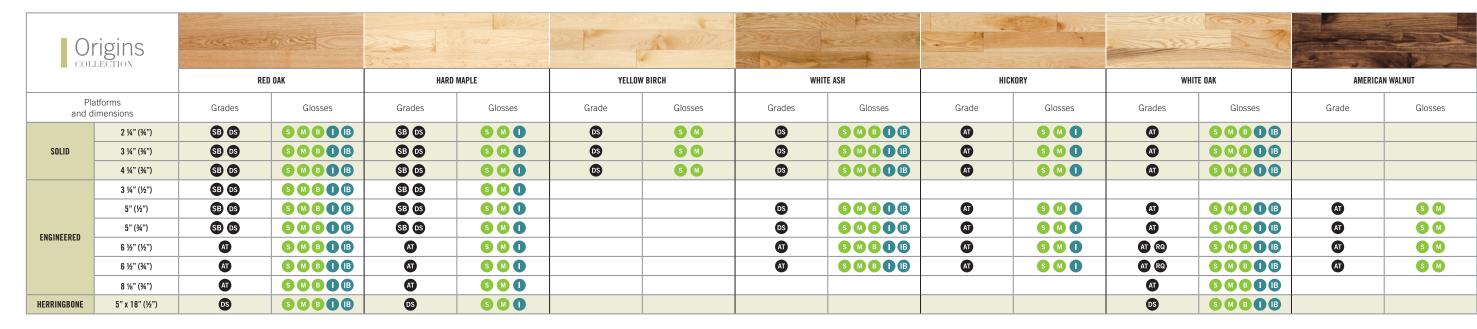



■ Ele	gancia	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\			- C					+	I.	2000		900						3/5
COLLE	CTION	SILVER GREY (SY)	ENGLISH TEA (ET)	SANDSTONE (SD)	MADERA (MD)	CREMA (CM)	FJORD (FO)	FUEGO (FU)	FUEGO (FU)	ROMA (RA)	TREMBLANT (TB)	JASPER (JP)	SUEDE (SU)	PALOMINO (PO)	BROOKLINE (86)	FUEGO (FU)	ENGLISH TEA (ET)	ACORN BROWN (82)	MODERN Grey (MG)	CONCRETE GREY (83)
		WHITE ASH			WHITE OAK				HICKORY			YELLOW BIRCH			YELLOW BIRCH					
	atforms imensions	Grades		Glosses	Gra	des	Glo	sses	Gra	ade	Glo	sses	Grade	Glosses		Grade			Glosses	
SOLID	3 ¼" (¾")	03	5	M B D B	A		S M	BOB	(D	5 (1	DS	M		03			SM	
20LID	4 1/4" (3/4")	OS	5	M B D B	A		SM	B O B	(T)	5 (0	DS	M		DS			SM	
	5" (½")	DS	S	M B D B	A		SM	B O B		AT .	5 (0								
	5" (¾")	DS	S	M B D B	A		SM	B O B		T)	5 (•								
ENGINEERED	6 ½" (½")	AT	5	M B D B	A		SM	B O B		AT .	5 (0								
	6 ½" (¾")	AT	S	M B D B	A		SM	B O B	4	AT .	5 (0								
	8 1/8" (3/4")				A		SM	B O B												
HERRINGBONE	5" x 18" (½")				0	•	SM	B O B												

Atmo	osphere	HAZE (HZ)	BREEZE (BE)	HUSH (HH)	HAZE (HZ)	HALO (HL)	BLISS (BI)	BREEZE (BE)	HAZE (HZ)	BREEZE (BE)	HUSH (HH)	HUSH (HH)	CHARM (C4)	SILK (SK)	WHISPER (WP)	BREEZE (BE)	GLEAM (GL)	SILK (SK)
		HARD MAPLE			RED OAK			HICKORY		WHITE		OAK		WHITE ASH				
	atforms limensions	Grades	5	Glosses	Gra	ides	Glo	sses	Grade		Glosses	Gra	ades	Glo	osses	Grades	5	Glosses
SOLID	3 1/4" (3/4")	OS		M D	()S	MB	O B	AT		M O		D	MB	OB	DS	M	BOB
20110	4 1/4" (3/4")	OS		M)S	MB	O B	AT		M O		AD .	M B	OB	DS	M	BOB
	3 ¼" (½")	DS		M D		os	MB	O B										
	5" (½")	DS		M D		os	MB	O B	AT		M I		AD .	M B	O B	DS	M	B O B
ENGINEERED	5" (¾")	DS		M ()		os	M B	1 B	AT		M I		AD .	M B	O B	DS	M	B O B
ENGINEERED	6 ½" (½")	AT		M D		I	MB	O B	AT		M I	(AT)	M B	O B	AT	M	BOB
	6 ½" (¾")	AT		M D		J	MB	O B	AT		M I		D	MB	O B	AT	M	B O B
	8 1/8" (3/4")	AT		M D		J	MB	O B					AT)	M B	O B			
HERRINGBONE	5" x 18" (½")	DS		M O	(os es	MB	OB					DS .	M B	OB			

	ement	te P		14 o		Fa.			
COLL	ECHON	ELEMENT (EL)	TERRAIN (TR)	ELEMENT (EL)			ELEMENT (EL)		
		HARD	MAPLE	WHIT	E OAK	HICKORY			
Platforms and dimensions		Grades	Gloss	Grades	Gloss	Grade	Gloss		
COLUD	3 ¼" (¾")	DS	M	AT)	M	AT)	M		
SOLID	4 1/4" (3/4")	DS	M	AT	M	AT)	M		
	3 ¼" (½")	DS	M						
	5" (½")	DS	M	AT	M	AT)	M		
	5" (¾")	DS	M	AT	M	AT	M		
ENGINEERED	6 ½" (½")	AT	M	AT	M	AT .	M		
	6 ½" (¾")	AT	M	AT	M	AT .	M		
	8 1/8" (3/4")	AT	M	AT	M				
HERRINGBONE	5" x 18" (½")	DS	M	DS	M				

Naked							NAKED (NK)		NAKED (NK)		NAKED (NK)		
			NAKED (NK) Hard Maple		NAKED (NK) White dak								
							KORY	AMERICAN WALNUT		WHITE ASH			
Platforms and dimensions		Grades	Glosses	Grades	Glosses	Grade	Glosses	Grade	Gloss	Grades	Glosses		
SOLID	3 ¼" (¾")	03	MO	AT	M B D B	AT	M O			03	M B D B		
20FID	4 ¼" (¾")	OS	MI	AT	MB DB	AT	M O			OS	M B D B		
	3 ¼" (½")	OS	MO										
	5" (½")	OS	MO	A	M B D B	AT)	MO	A	M	DS	M B O B		
FNOWFFRE	5" (¾")	DS	MO	AT	M B D B	AT)	MO	AI	M	DS	M B O B		
ENGINEERED	6 ½" (½")	AI	MO	AT RO	M B D B	AT	MO	AI	M	AT	M B O B		
	6 ½" (¾")	AD	MO	AT RO	M B D B	A	MO	AI	M	AT	M B O B		
	8 1/8" (3/4")	A	MO	AT	M B D B								
HERRINGBONE	5" x 18" (½")	DS	MO	OS	MB DB								

	3 ¼" (¾")	PR			PB		PRO		P	
Platforms and dimensions		Gra	de	Glosses		Gra	ade	Glosses		
			RED	OAK		HARD MAPLE				
		NATURAL (00)	MOCCASIN (80)	BROOKLINE (86)	CONCRETE GREY (83)	ACORN BROWN (82)	GUNSTOCK (12)	CARBON (84)	GRIZZL (85)	
	PRO	HARD MAPLE	1			20 tr	234		37	
		RED DAK		25 2 2 2						







Solid or Engineered: Take your pick!

		CONTROL CONTRO	
	SOLID (SOLID WOOD)	ENGINEERED (ENGINEERED WOOD)	MOLDINGS
NATURE OF MATERIAL	100% HARDWOOD	TOP LAYER: HARDWOOD, 4MM THICK BASE: HARDWOOD PLYWOOD	T-MOLDINGS, QUARTER ROUNDS, THRESHOLDS SUITABLE FOR SOLID AND ENGINEERED ½" & ¾"
SPECIAL FEATURES OF MATERIAL	100% SOLID WOOD NATURAL CHARM	UNBEATABLE STABILITY SUITABLE FOR ALL SURFACES	1 ½* 1½* 3½* 3½* 3½* 3½* 3½* 3½* 3
TYPES OF INSTALLATIONS	NAILED AND STAPLED	NAILED, GLUED, STAPLED*, AND FLOATING	5½° 3½° 3½°
INSTALLATION IN THE BASEMENT OR ON CONCRETE	NOT RECOMMENDED	POSSIBLE	REDUCERS SUITABLE FOR SOLID SUITABLE FOR AND ENGINEERED %* ENGINEERED ½*
SANDING	YES: FROM 3 TO 5 TIMES	YES: FROM 3 TO 5 TIMES	- AND ENGINEERED % ENGINEERED ½
SPECIES	HARD MAPLE HICKORY RED OAK WHITE ASH WHITE OAK YELLOW BIRCH	AMERICAN WALNUT HARD MAPLE HICKORY RED OAK WHITE ASH WHITE OAK	STAIR NOSINGS SUITABLE FOR SOLID AND ENGINEERED %"
GRADE (ACCORDING TO THE SPECIES)	SELECT & BETTER, DISTINCTION, PRO, AUTHENTIC	SELECT & BETTER, DISTINCTION, PRO, AUTHENTIC, R&Q	Round nosing Square nosing 4* 4 1/4*
THICKNESS AND WIDTH (ACCORDING TO THE SPECIES)	2 ¼" (57 MM) X ¾" (19 MM) 3 ¼" (83 MM) X ¾" (19 MM) 4 ¼" (108 MM) X ¾" (19 MM)	3 ¼* (83 MM) X ½* (12,7 MM) 5* (127 MM) X ½* (12,7 MM) 5* (127 MM) X ¾* (19 MM) 6 ½* (165 MM) X ½* (12,7 MM) 6 ½* (165 MM) X ¾* (19 MM) 8 ½* (206 MM) X ¾* (19 MM)	1° 2¾° 1° 3¼° SUITABLE FOR ENGINEERED ½°
LENGTH	RANDOM	RANDOM	Round nosing Square nosing
HERRINGBONE AVAILABILITY (Suitable for a Herringbone pattern installation only)	NOT AVAILABLE	5" (127 MM) X ½" (12,7 MM) LENGTH: 18" (45,7 CM) HARD MAPLE RED OAK WHITE OAK	4 ½* 4 ½* 4 ½* 3 ½* 3 ½* 3 ½*

^{*} REFER TO TECHNICAL BULLETIN # 9

It's all about the finish.



MERCIER GENERATIONS

An ultra-durable wood floor finish, Mercier Generations is perfect for a regular everyday use. The safest, healthiest choice for you and your family. This finish is available on all floors.



GENERATIONS INTACT 2500*

The ultimate in durability. Made with micro-fragmented aluminum particles, it can withstand harsher use in such environments as high-traffic spaces, or commercial applications. The hydrophobic molecules in the Generations Intact 2500 finish interlock with the wood cells for unmatched protection.

Generations of ingenuity and performance

FEATURES	MERCIER GENERATIONS	GENERATIONS INTACT 2500
ANTIMICROBIAL TREATMENT The antimicrobial contained in our finishes helps reduce the risk of spreading bacteria and mildew. Completely non-toxic, this special treatment adds an additional level of protection for healthier floors.	•	•
NON-YELLOWING Our non-yellowing process consists of 2 different UV screens that protect the original color of the floor from various light sources that could alter it: • A UV screen against yellowing of the finish when exposed to natural or artificial lighting • A UV screen to create a protective barrier that delays the yellowing of the natural wood and reduces the intensity of the color change when the latter occurs	•	•
HYPOALLERGENIC	•	•
STAIN RESISTANT	•	•
GREENGUARD CERTIFIED	•	•
CONTAINS PLANT-BASED OIL	•	•
DEGREE OF RESISTANCE The TABER test involves mounting a portion of a finished board onto a turntable fitted with sheets of abrasive paper. The degree of resistance is evaluated based on the number of rotations it takes to completely wear down the finish. The higher the number of cycles, the more resistant the finish.	1,000 cycles Compared to 500 cycles from the competition	2,500 cycles Compared to 1,500 cycles from the competition
DURABILITY	Scratch-resistant	Anti-scratch The top layer being packed with micro-fragmented aluminum particles, it creates a multipoint contact surface that is much more resistant to the scratches caused by the frequent traffic in highly solicited spaces.
FLEXIBILITY	Flexible	Highly flexible
ANTI-PERFORATION	Perforation-resistant	Anti-perforation
WARRANTY Quite simply the best warranties in the industry	35 years for residential applications 5 years for light commercial applications 20 years for residential applications, PRO Collection	50 years for residential applications 3 years for commercial applications with direct outdoor access 10 years for light commercial applications

^{*}Minimum quantities and upcharges apply. Please refer to the current Mercier Price List for more details.



CERTIFIED GREENGUARD GOLD, OUR WOOD FLOOR FINISHES ARE FREE FROM ANY HARMFUL CHEMICALS AND FORMALDEHYDE. THEY EMIT NO HARMFUL VOCS AND REDUCE THE PROLIFERATION OF MOLD AND BACTERIA. WITH MERCIER, CLIENTS' WELL-BEING COMES FIRST.

Packaging features

				BOXES		
	Board width	Content (sq. ft.)	Width (in)	Length (in)	Height (in)	Weight (lb)
	2 1/4" (3/4")	20 sq. ft.	9 1/4"	84"	3 1/4"	57 lb
SOLID	3 1/4" (3/4")	22 sq. ft.	10"	87"	3 1/4"	60 lb
	4 1/4" (3/4")	19 sq. ft.	9 1/4"	84"	3 1/4"	55 lb
	3 1/4" (1/2")	33.6 sq. ft.	10"	87"	3 1/4"	67 lb
	5" (½")	33 sq. ft.	10"	87"	3 1/4"	62 lb
ENGINEEDED	5" (¾")	22 sq. ft.	10"	87"	3 1/4"	62 ½ lb
ENGINEERED	6 ½" (½")	33 sq. ft.	6 3/4"	88"	4 ½"	66 lb
	6 ½" (¾")	22 sq. ft.	6 ¾"	88"	4 ½"	64 lb
	8 1/8" (3/4")	18 sq. ft.	8 ½"	88"	3 1/4"	53 lb
HERRINGBONE	5" x 18" (½")	25 sq. ft.	10"	87"	3 1/4"	47 lb

					ALLETS		
В	Board width		Content (sq. ft.)	Width (in)	Length (in)	Height (in)	Weight (lb)
	2 1/4" (3/4")	40	800 sq. ft.	38"	84"	36"	2 200 to 2 500 lb
SOLID	3 1/4" (3/4")	40	880 sq. ft.	42"	87"	36"	2 200 to 3 000 lb
	4 1/4" (3/4")	40	760 sq. ft.	38"	84"	36"	2 200 to 2 500 lb
	3 1/4" (1/2")	40	1 344 sq. ft.	42"	87"	36"	2 700 to 3 000 lb
_	5" (½")	40	1 320 sq. ft.	42"	87"	36"	2 700 to 3 000 lb
FNOINEEDED	5" (¾")	40	880 sq. ft.	42"	87"	36"	2 700 to 3 000 lb
ENGINEERED -	6 ½" (½")	42	1 386 sq. ft.	42"	88"	37"	2 400 to 2 800 lb
_	6 ½" (¾")	42	924 sq. ft.	42"	88"	37"	2 500 to 2 700 lb
	8 1/8" (3/4")	50	900 sq. ft.	44"	88"	36"	2 300 to 2 500 lb
HERRINGBONE	5" x 18" (½")	40	1 000 sq. ft.	42"	87"	36"	1 900 to 2 500 lb

Important notice: The information contained in this document was accurate at the time of printing. Mercier Wood Flooring Inc. reserves the right to change products and product characteristics at any time without notice.

